


Parts List

884737_3.0



Flygt 2860.180

Table of Contents

1	Introduction.....	2
1.1	Specially approved products.....	2
2	Product Description.....	3
2.1	Products included.....	3
2.2	The data plate.....	3
2.3	Product denomination.....	3
3	Spare Parts.....	5
3.1	Exploded view.....	5
3.2	List of parts.....	6

1 Introduction

Purpose of this manual

The purpose of this manual is to provide necessary information on spare parts and accessories order.

Disclaimer

Always use genuine Flygt parts. The use of other spare parts or accessories can invalidate any claims for warranty or compensation. Xylem does not take any responsibility for damages that are caused by the use of non-original parts. For more information, contact your local sales and service representative.

Data for ordering spare parts

The following information is needed for spare part orders:

- Serial number of the product
- Part number
- Quantity of bulk material, see * in tables

1.1 Specially approved products

Qualification of personnel

Only Xylem or Xylem-authorized service personnel may undertake repair work on specially approved products.

Dimensional accuracy inspection

Spare parts marked with (Ex) after the part number are subject to dimensional accuracy inspection when used in specially approved products.

2 Product Description

2.1 Products included

Pump model	Standard	Ex-proof	MSHA	Drainage	Sludge	Pareo™
2860.180	X			X		X

2.2 The data plate

The data plate is a metal label that is located on the main body of the products. The data plate lists key product specifications. Specially approved products also have an approval plate.

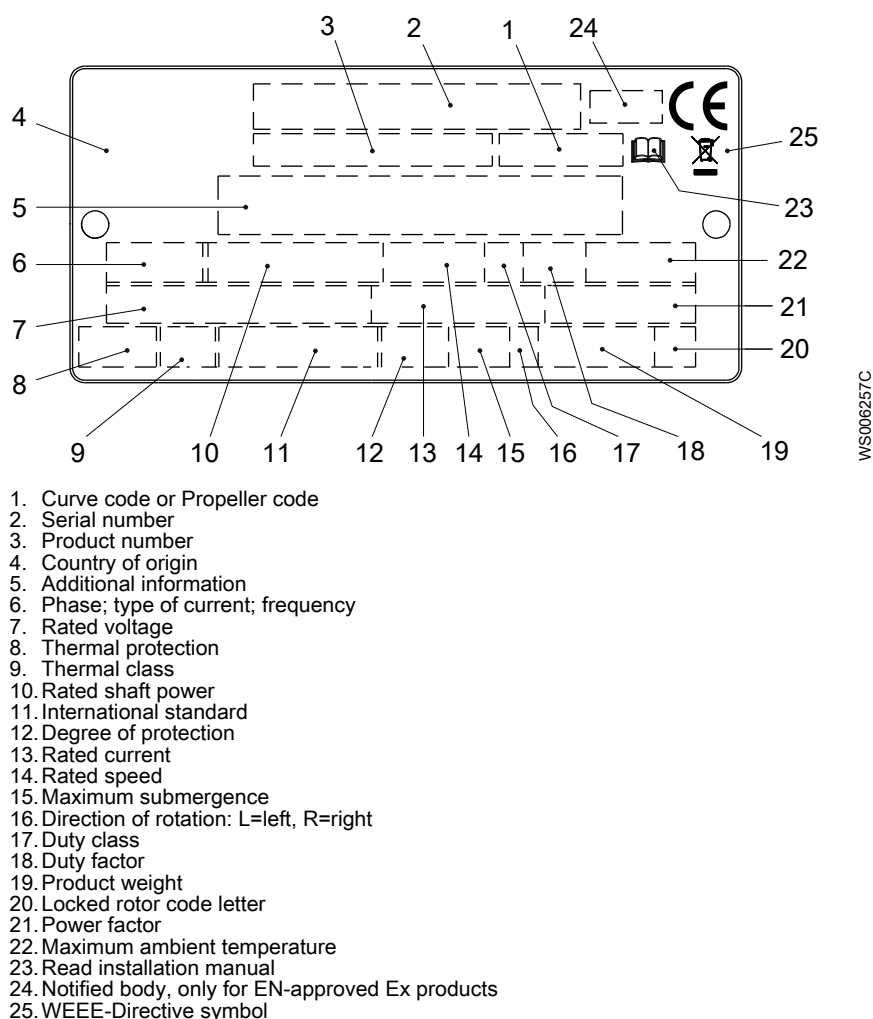


Figure 1: The data plate

2.3 Product denomination

Reading instruction


In this section, code characters are illustrated accordingly:

X = letter

Y = digit

The different types of codes are marked up with a, b and c. Code parameters are marked up with numbers.

Codes and parameters

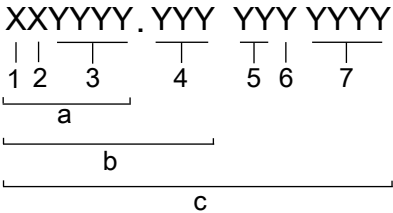


WS006265B

Type of Callout	Number	Indication
Type of code	a	Sales denomination
	b	Product code
	c	Serial number
Parameter	1	Hydraulic end
	2	Type of installation
	3	Sales code
	4	Version
	5	Production year
	6	Production cycle
	7	Running number

3 Spare Parts

3.1 Exploded view

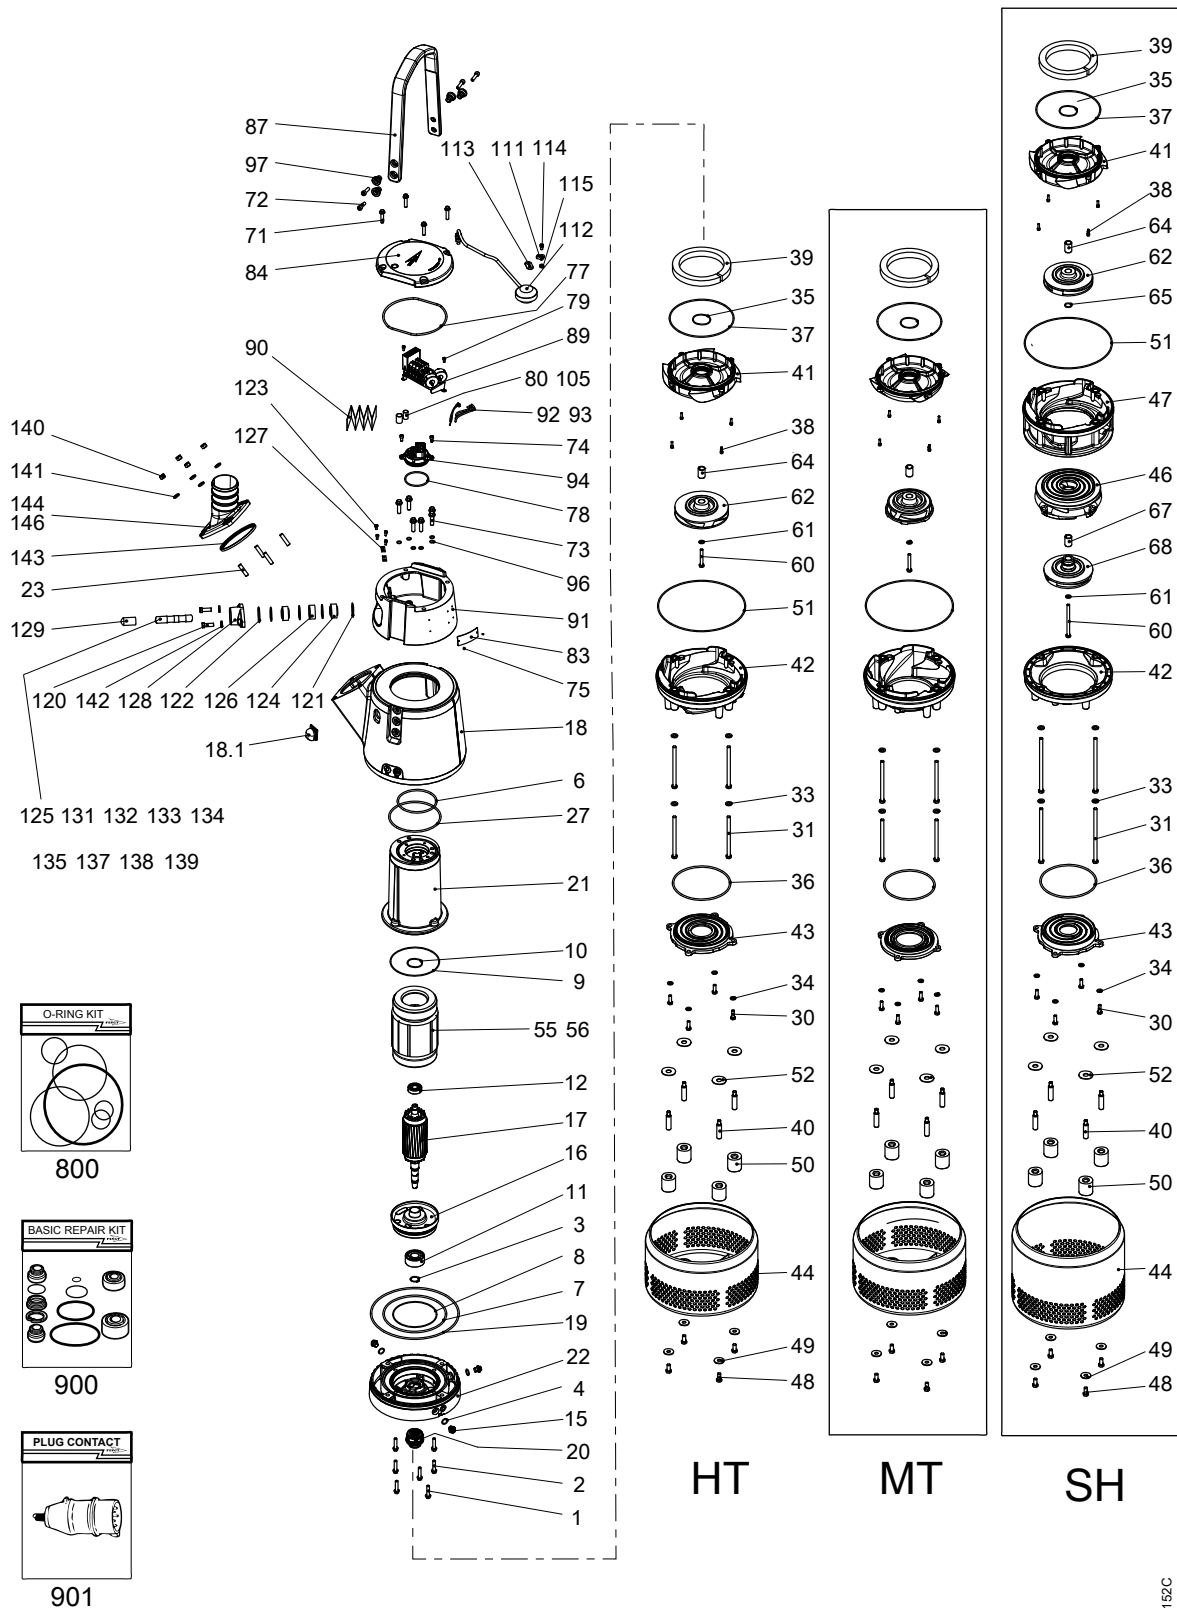

3.2 List of parts

Pos. No	Part. No	Type	Denomination	Qty/Version
				180
1	81 64 91	(Ex)	Hexagon flange screw M10X45-A2-70	4
2	81 64 91		Hexagon flange screw M10X45-A2-70	3
3	82 59 00		Retaining ring SGA 30	1
4	82 72 95		O-ring 19.2X3 FPM	3
5	82 72 95		O-ring 19.2X3 FPM	6
6	82 74 20		O-ring 139.3X5.7 NBR	1
7	82 74 95		O-ring 219.3X5.7 NBR	1
8	82 78 26		O-ring 156X3 NBR	1
9	82 78 35		O-ring 175X3 NBR	1
10	82 79 28		O-ring 52.5X3.0 FPM	1
11	83 30 16		Ball bearing 30X72X30.2 MM	1
12	83 33 13		Ball bearing 20X52X15 MM	1
13	90 17 52		Oil ISO VG 32	*
14	427 13 00		Marking tape	1
15	428 22 17		Inspection screw BRASS	3
16	606 69 00		Bearing holder	1
17	643 56 01		Shaft unit	1
18	774 30 00		Outer casing	1
19	82 75 04		O-ring 319.3X5.7 NBR	1
20	769 87 33		Mechanical seal dbl. AL203/WCCR,WCCR/WCCR FPM	1
21	774 86 00		Stator housing	1
22	774 87 00		Adapter	1
23	80 95 29		Stud M12X35-A2-70	4
24	706 11 00		Air release valve	1
27	82 74 91		O-ring 189.3X5.7 NBR	1
30	81 41 32		Hexagon head screw M10X30-A2-70	4
31	81 41 74		Hexagon head screw M12X180-A2-70 MT HT	4
31	81 41 19		Hexagon head screw M12X240-A2-70 SH	4
32	82 23 35		Hexagon nut M12-A4-70	4
33	82 35 20		Plain washer 13X24X2.5-A2-170HV	4
34	82 35 76		Plain washer 10.5X20X2-A4-170HV	4
35	82 71 71		O-ring 62X3.0 FPM	1
36	82 74 88		O-ring 174.3X5.7 NBR MT	1
36	82 74 93		O-ring 199.3X5.7 NBR SH HT	1
37	82 81 97		O-ring 230.0X4.0 FPM	1

Pos. No	Part. No	Type	Denomination	Qty/Version
				180
38	83 02 77		Hex.socket hd screw M6X20-A4-70	4
39	83 94 69		Pressure equalizer L=650 MM	1
40	784 87 00		Holder	4
41	693 95 00		Seal housing cov.coa MT	1
41	693 94 00		Seal housing cov.coa HT	1
41	726 32 00		Seal housing cov.coa SH	1
42	693 99 00		Diffuser coat. NBR MT	1
42	774 72 00		Diffuser coat. PU MT	1
42	693 97 00		Diffuser coat. NBR HT	1
42	774 73 00		Diffuser coat. PU HT	1
42	726 27 00		Diffuser coat. NBR SH	1
42	774 75 00		Diffuser coat. PU SH	1
43	694 05 00		Suction cover MT B DN 150 Material suction cover: Hard iron	1
43	694 03 00		Suction cover MT K DN 150 Material suction cover: NBR	1
43	694 04 00		Suction cover HT B DN 100 Material suction cover: Hard iron	1
43	739 67 00		Suction cover HT B DN 100 Material suction cover: Stainless steel	1
43	726 24 00		Suction cover SH B DN 100 Material suction cover: Hard iron	1
44	826 28 01		Strainer MT	1
			HT	
44	826 28 02		Strainer SH	1
46	726 25 00		Diffuser coat.	1
47	726 29 00		Diffuser coat. NBR SH	1
47	774 74 00		Diffuser coat. PU SH	1
48	81 41 54		Hexagon head screw M12X25-A2-70	4
49	82 37 97		Plain washer 13X37X3-A4-170HV	4
50	784 85 00		Damper	4
51	84 69 31		O-ring 315X4 NBR	1
52	82 40 83		Plain washer 20.5X52X2-A2-70	4
55	647 16 08	(Ex)	Stator 18-15-2b 6-leads 3-phase 60 Hz 2-poles 200V-208V D	1
55	647 16 02	(Ex)	Stator 18-15-2b 6-leads 3-phase 50 Hz 2-poles 220V-240V D	1
			6-leads 3-phase 50 Hz 2-poles 220V-230V D 380V-400V Y	
55	647 16 06	(Ex)	Stator 18-15-2b 6-leads 3-phase 60 Hz 2-poles 220V-240V D	1

Pos. No	Part. No	Type	Denomination	Qty/Version
				180
55	647 16 04	(Ex)	Stator 18-15-2b 9-leads 3-phase 60 Hz 2-poles 220V-240V Y// 440V-480V YSER	1
55	647 16 16	(Ex)	Stator 18-15-2b 9-leads 3-phase 60 Hz 2-poles 220V-240V Y// 9-leads 3-phase 60 Hz 2-poles 440V-480V YSER 6-leads 3-phase 50 Hz 2-poles 660V-690V Y 6-leads 3-phase 50 Hz 2-poles 380V-400V D 6-leads 3-phase 60 Hz 2-poles 440V-480V D 6-leads 3-phase 50 Hz 2-poles 380V-400V D 660V-690V Y	1
55	647 16 14	(Ex)	Stator 18-15-2b 3-leads 3-phase 60 Hz 2-poles 460V-480V Y	1
55	647 16 10	(Ex)	Stator 18-15-2b 6-leads 3-phase 60 Hz 2-poles 380V-400V D	1
55	647 16 11	(Ex)	Stator 18-15-2b 12-leads 3-phase 60 Hz 2-poles 380V-400V Y// 12-leads 3-phase 60 Hz 2-poles 440V-460V DSER	1
55	647 16 01	(Ex)	Stator 18-15-2b 6-leads 3-phase 50 Hz 2-poles 415V-440V D	1
55	647 16 03	(Ex)	Stator 18-15-2b 6-leads 3-phase 50 Hz 2-poles 500V D 6-leads 3-phase 60 Hz 2-poles 575V-600V D	1
55	647 16 15	(Ex)	Stator 18-15-2b 3-leads 3-phase 60 Hz 2-poles 575V-600V Y	1
55	647 16 05	(Ex)	Stator 18-15-2b 6-leads 3-phase 50 Hz 2-poles 1000V Y 6-leads 3-phase 50 Hz 2-poles 525V-550V D 1000V Y 6-leads 3-phase 50 Hz 2-poles 525V-550V D	1
56	83 44 24		Closed-end splice 3-6 (AWG 12-10)	1-3
60	81 43 28		Hexagon head screw M10X70- A2-70 B-impeller MT B-impeller HT	1
60	81 56 72		Hexagon head screw M10X90- A4-80 K-impeller MT	1
60	81 41 48		Hexagon head screw M10X140- A2-70 B-impeller SH	1
61	82 35 76		Plain washer 10.5X20X2- A4-170HV	1
62	694 09 00		Impeller B-impeller MT 50Hz 3-phase Maximum temperature 40 DC Material Hard-Iron TM Curve code: 226	1

Pos. No	Part. No	Type	Denomination		Qty/Version
					180
62	694 09 02		Impeller	B-impeller MT 60Hz 3-phase Maximum temperature 40 DC Material Hard-Iron TM Curve code: 228	1
62	694 09 01		Impeller	B-impeller MT 50Hz 3-phase Maximum temperature 70 DC Material Hard-Iron TM Curve code: 230	1
62	694 09 03		Impeller	B-impeller MT 60Hz 3-phase Maximum temperature 70 DC Material Hard-Iron TM Curve code: 232	1
62	694 13 00		Impeller	K-impeller MT 50Hz 3-phase Maximum temperature 40 DC Material Hard-Iron TM Curve code: 234	1
62	694 13 02		Impeller	K-impeller MT 60Hz 3-phase Maximum temperature 40 DC Material Hard-Iron TM Curve code: 236	1
62	694 13 01		Impeller	K-impeller MT 50Hz 3-phase Maximum temperature 70 DC Material Hard-Iron TM Curve code: 238	1
62	694 13 03		Impeller	K-impeller MT 60Hz 3-phase Maximum temperature 70 DC Material Hard-Iron TM Curve code: 240	1
62	694 08 00		Impeller	B-impeller HT 50Hz 3-phase Maximum temperature 40 DC Material Hard-Iron TM Curve code: 251	1
62	694 08 04		Impeller	B-impeller HT 60Hz 3-phase Maximum temperature 40 DC Material Hard-Iron TM Curve code: 253	1
62	694 08 01		Impeller	B-impeller HT 50Hz 3-phase Maximum temperature 70 DC Material Hard-Iron TM Curve code: 255	1
62	694 08 03		Impeller	B-impeller HT 60Hz 3-phase Maximum temperature 70 DC Material Hard-Iron TM Curve code: 257	1
62	739 63 00		Impeller	B-impeller HT 50Hz 3-phase Maximum temperature 40 DC Material Stainless steel, castings Curve code: 266	1
62	739 63 04		Impeller	B-impeller HT 60Hz 3-phase Maximum temperature 40 DC Material Stainless steel, castings Curve code: 267	1

Pos. No	Part. No	Type	Denomination	Qty/Version
				180
62	739 63 01		Impeller B-impeller HT 50Hz 3-phase Maximum temperature 70 DC Material Stainless steel, castings Curve code: 268	1
62	739 63 03		Impeller B-impeller HT 60Hz 3-phase Maximum temperature 70 DC Material Stainless steel, castings Curve code: 269	1
62	752 43 00		Impeller B-impeller SH 50Hz 3-phase Maximum temperature 40 DC Material Hard-Iron TM Curve code: 276	1
62	752 43 01		Impeller B-impeller SH 60Hz 3-phase Maximum temperature 40 DC Material Hard-Iron TM Curve code: 278	1
62	752 43 02		Impeller	1
62	752 43 03		Impeller	1
64	779 90 00		Sleeve unit	1
65	82 73 90		O-ring 19.2X3 NBR	1
67	779 90 00		Sleeve unit	1
68	752 42 00		Impeller B-impeller SH 50Hz 3-phase Maximum temperature 40 DC Material Hard-Iron TM Curve code: 276	1
68	752 42 01		Impeller B-impeller SH 60Hz 3-phase Maximum temperature 40 DC Material Hard-Iron TM Curve code: 278	1
68	752 42 02		Impeller	1
68	752 42 03		Impeller	1
71	81 64 91		Hexagon flange screw M10X45- A2-70	4
72	82 00 53		Hex.socket hd screw M10X35- A2-70	4
73	81 64 93		Hexagon flange screw M12X45- A2-70	6
74	82 00 30		Hex.socket hd screw M8X16- A2-70	2
75	82 20 88		Drive screw 4X5-A2/A4	2
77	82 74 95		O-ring 219.3X5.7 NBR	1
78	82 78 15		O-ring 78X4 NBR	1
79	83 02 73		Hex.socket hd screw M6X12- A4-70	2
80	94 05 15		Insulating hose D=16 MM	*
80	94 05 15		Insulating hose D=16 MM	1
83	630 68 00	(Ex)	Data plate USE 6306801 AS SPARE PART	1
84	774 28 00		Cover	1
84	774 28 01		Cover	1

Pos. No	Part. No	Type	Denomination	Qty/Version
				180
87	774 29 00		Handle	1
88	718 05 00		Sticker CUT HAZARD	1
89	821 02 01		Sensor unit	1
			Sensor unit DCM 711 50/60Hz 3-phase 0V - 1000V CSA approved Motor cable conductor size max: 35mm ²	
89	673 89 04		Contactor unit	1
			60Hz 3-phase 200V - 208V Float switch CSA approved 60Hz 3-phase 220V - 240V CSA approved 50Hz 3-phase 220V - 240V Not CSA approved 60Hz 3-phase 200V - 208V CSA approved 50Hz 3-phase 220V - 240V Float switch Not CSA approved 60Hz 3-phase 220V - 240V Float switch CSA approved	
89	673 89 00		Contactor unit	1
			50Hz 3-phase 500V - 500V Not CSA approved 50Hz 3-phase 380V - 400V Float switch Not CSA approved 60Hz 3-phase 380V - 400V Not CSA approved 50Hz 3-phase 415V - 440V Not CSA approved 50Hz 3-phase 380V - 400V Not CSA approved	
89	718 73 24		Contactor unit	1
			50Hz 3-phase 525V - 550V Not CSA approved	
89	718 73 25		Contactor unit	1
			60Hz 3-phase 440V - 480V CSA approved 60Hz 3-phase 380V - 400V CSA approved	
89	718 73 27		Contactor unit	1
			60Hz 3-phase 575V - 600V CSA approved	
89	693 79 01		Con.term.board unit	1
			Terminal board 60Hz 3-phase 0V - 480V Y/D Not CSA approved Motor cable conductor size max: 16mm ² Terminal board 50Hz 3-phase 0V - 415V Y/D Not CSA approved Motor cable conductor size max: 16mm ²	
90	773 49 05		Connection plate	1
91	774 27 00		Main cover	1
92	573 58 68		Single-core cable	1
			Sensor unit DCM 711 Contactor unit	
92	573 58 53		Single-core cable	2
			Sensor unit DCM 711 Contactor unit	

Pos. No	Part. No	Type	Denomination	Qty/Version
				180
92	573 58 68		Single-core cable Sensor unit DCM 711 Contactor unit	2
92	573 58 53		Single-core cable Sensor unit DCM 711 Contactor unit	1
92	573 58 63		Single-core cable Contactor unit	1
92	573 58 69		Single-core cable Contactor unit	1
93	761 62 04		Cable set Sensor unit DCM 711	1
93	761 62 01		Cable set Contactor unit	1
94	761 44 00		Terminal plate unit Sensor unit DCM 711 3-phase Contactor unit 3-phase	1
94	777 00 00		El.lead through unit 6X + 2X	1
96	82 73 84		O-ring 12.3X2.4 NBR	6
97	774 32 00		Sleeve	4
101	773 42 09		Cable set	1
102	821 49 00		Sticker	1
105	94 05 17		Insulating hose D=20 MM	*
105	94 05 17		Insulating hose D=20 MM	1
111	84 66 53		Cable clamp STAINLESS STEEL, CR	1
112	761 04 06		Level switch EU Sensor unit DCM 711 50Hz 3- phase 0V - 1000V Float switch with isolated input Not CSA approved	1
112	761 04 07		Level switch US/CDN Sensor unit DCM 711 60Hz 3- phase 0V - 1000V Float switch with isolated input CSA approved	1
112	761 04 02		Level switch EU Contactor unit 50Hz 3-phase 220V - 240V Float switch Not CSA approved	1
112	761 04 04		Level switch EU Contactor unit 50Hz 3-phase 380V - 400V Float switch Not CSA approved	1
112	761 04 03		Level switch US/CDN Contactor unit 60Hz 3-phase 200V - 208V Float switch CSA approved Contactor unit 60Hz 3-phase 220V - 240V Float switch CSA approved	1
113	778 95 00		Bracket	1
114	82 00 28		Hex.socket hd screw M8X12- A2-70	1
115	82 23 32		Hexagon nut M8-A4-70	1
120	81 41 56		Hexagon head screw M12X35- A2-70	2
121	82 40 81		Plain washer 32.5X52X2-A2-70	4
121	82 40 82		Plain washer 34.5X52X2-A2-70	4
121	82 40 69		Plain washer 35.5X52X2-A2-70	4
122	82 74 63		O-ring 49.5X3 NBR	1

Pos. No	Part. No	Type	Denomination	Qty/Version
				180
123	83 02 77		Hex.socket hd screw M6X20-A4-70	2
123	83 02 77		Hex.socket hd screw M6X20-A4-70	4
124	84 17 99		Seal sleeve (12)-14 MM NBR	2
124	84 18 01		Seal sleeve (17)-20 MM NBR	2
124	84 18 02		Seal sleeve (20)-23 MM NBR	2
124	84 18 00		Seal sleeve (14)-17 MM NBR	2
124	84 18 03		Seal sleeve (23)-26 MM NBR	2
124	84 18 04		Seal sleeve (26)-29 MM NBR	2
124	84 18 05		Seal sleeve (29)-32 MM NBR	2
124	84 18 06		Seal sleeve (32)-35 MM NBR	2
125	94 20 42		Motor cable subcab 4G2.5 Power cable x 1 SUBCAB 4G2,5 12,50 - 13,50mm Max 750V	*
125	94 20 59		Motor cable subcab 4G2.5+2X1.5 17 - 18mm Max 750V	*
125	94 20 82		Motor cable subcab 7G2.5+2X1.5 20 - 22mm Max 750V Only for YD-connection	*
125	94 20 43		Motor cable subcab 4G4 16 - 17mm Max 750V	*
125	94 20 60		Motor cable subcab 4G4+2X1.5 20 - 22mm Max 750V	*
125	94 20 44		Motor cable subcab 4G6 18 - 19mm Max 750V	*
125	94 20 56		Motor cable subcab 4G6+2X1.5 24 - 26mm Max 750V	*
125	94 19 81		Motor cable subcab 4G10+S(2X0.5) 24 - 26mm Max 1000V	*
125	94 21 03		Motor cable subcab 12 AWG/4 17 - 18mm Max 600V	*
125	94 21 04		Motor cable subcab 12 AWG/7 20 - 22mm Max 600V	*
125	94 21 05		Motor cable subcab 10 AWG/4 18 - 19,70mm Max 600V	*
125	94 21 06		Motor cable SUBCAB 10AWG/3-2-1-GC 20,30 - 22,30mm Max 600V	*
125	94 21 07		Motor cable subcab 8 AWG/4 24 - 26mm Max 600V	*
125	94 21 08		Motor cable SUBCAB 8AWG/3-2-1-GC 27,20 - 29,20mm Max 600V	*
125	94 21 09		Motor cable SUBCAB 6AWG/3-2-1-GC 30 - 32mm Max 600V	*
125	94 21 10		Motor cable 4AWG/3-2-1-GC 32,80 - 34,80mm Max 600V	*
125	94 17 23		Motor cable 3X2,5MM 13,50 - 14,90mm Max 1000V	*
125	94 17 24		Motor cable SCREENED 6X2,5+2*1,5 18,10 - 19,90mm Max 1000V Only for YD-connection	*
125	94 19 90		Motor cable subcab S3X2.5+3X2.5/3+S(4X0.5) 18 - 20mm Max 1000V	*
126	597 98 02	(Ex)	Sleeve	1
127	642 16 00	(Ex)	Earthing plate	1
127	642 16 00	(Ex)	Earthing plate	2
128	642 17 04		Entrance flange (12)-35 MM	1
129	82 70 86		Cap 6X16 MM PVC	1
129	82 70 85		Cap 5X10 MM PVC	1
130	82 97 74		Cap 24X45 MM PVC	1

Pos. No	Part. No	Type	Denomination	Qty/Version
				180
130	82 97 68		Cap 18X25 MM PVC	1
131	83 42 36		End sleeve 0.75 MM2; L=6 MM	2
132	83 42 62		Closed-end splice 0.33-0.82 (AWG 22-18)	2
132	83 42 62		Closed-end splice 0.33-0.82 (AWG 22-18)	8
133	83 43 62		Cable lug UL/CSA 0.50-1.65 MM2 M6	1
134	94 03 30		Shrink hose ID=12 MM	*
135	94 03 33		Shrink hose ID=3.2 MM	*
137	83 44 24		Closed-end splice 3-6 (AWG 12-10)	2
138	93 00 77		Shrink hose ID=6.4 MM	*
139	94 03 34		Shrink hose ID=6.4 MM	*
140	82 23 35		Hexagon nut M12-A4-70	4
141	82 35 20		Plain washer 13X24X2.5-A2-170HV	4
142	82 35 20		Plain washer 13X24X2.5-A2-170HV	2
143	275 17 00		U-ring	1
144	693 29 00		Discharge connection 3" DN 75 Hose 3" aluminium	1
144	693 29 01		Discharge connection ISO G3" DN 75 Thread: ISO G3A Outer aluminium	1
144	693 29 04		Discharge connection VICTUALIC 3" DN 75 Thread: Victaulic groove Outer aluminium	1
144	693 29 03		Discharge connection 3"-8 NPT DN 75 Thread: NPT 3-8 Outer aluminium	1
144	665 15 00		Discharge connection 4" DN 100 Hose aluminium	1
144	665 15 01		Discharge connection ISO G4" DN 100 Thread: ISO G4A Outer aluminium	1
144	665 15 04		Discharge connection 4" DN 100 Thread: Victaulic groove Outer aluminium	1
144	665 15 03		Discharge connection 4-8 NPT DN 100 Thread: NPT 4-8 Outer aluminium	1
144	665 16 00		Discharge connection 6" DN 150 Hose aluminium	1
144	665 16 01		Discharge connection ISO G6" DN 150 Thread: ISO G6A Outer aluminium	1
144	665 16 04		Discharge connection 6" DN 150 Thread: Victaulic groove Outer aluminium	1
144	665 16 03		Discharge connection 6-8 NPT DN 150 Thread: NPT 6-8 Outer aluminium	1
146	83 18 46		Coupling part STORZ ISO G3 89MM DN 75 Thread: ISO G3A Outer Quick coupling: Storz diam=89 mm aluminium	1
146	83 19 34		Coupling part STORZ ISO G4 133MM DN 100 Thread: ISO G4A Outer Quick coupling: Storz diam=133 mm aluminium	1
146	83 19 33		Coupling part STORZ ISO G4 115MM DN 100 Thread: ISO G4A Outer Quick coupling: Storz diam=115 mm aluminium	1

Pos. No	Part. No	Type	Denomination	Qty/Version
				180
146	83 19 36		Coupling part DN 150 Thread: ISO G6A Outer Quick coupling: Storz diam=160 mm aluminium	1
150	82 20 88		Drive screw 4X5-A2/A4	2
151	630 76 00		Plate HOT WATER PRODUCT	1
154	83 49 44		Plug contact 3-phase 50 Hz 380V - 415V Current range: 0 - 32A Plug combined with short cable: No cable Supply connection: CEE 5- PLUG 32A	1
154	84 06 60		Plug contact 3-phase 50 Hz 380V - 415V Current range: 0 - 32A Plug combined with short cable: No cable Supply connection: CEE 4- PLUG 32A	1
800	782 45 00		O-ring kit	1
801	785 06 00		Zinc anode kit	1
815	824 35 09		Starter Starter (Large box) DCM 711 3- phase 60 Hz 200V - 208 V Thermal contact supervision Cable area max: 13,30 mm2 Bluetooth Starter (Large box) DCM 711 3- phase 60 Hz 220V - 240 V Thermal contact supervision Cable area max: 13,30 mm2 Bluetooth Starter (Large box) DCM 711 3- phase 50 Hz 220V - 240 V Thermal contact supervision Cable area max: 13,30 mm2 Bluetooth	1

Pos. No	Part. No	Type	Denomination	Qty/Version
				180
815	824 35 06		Starter Starter (Small box) DCM 711 3-phase 50 Hz 660V - 690 V Thermal contact supervision Cable area max: 6 mm² Bluetooth Starter (Small box) DCM 711 3-phase 50 Hz 500V - 500 V Thermal contact supervision Cable area max: 6 mm² Bluetooth Starter (Small box) DCM 711 3-phase 50 Hz 525V - 550 V Thermal contact supervision Cable area max: 6 mm² Bluetooth Starter (Small box) DCM 711 3-phase 50 Hz 380V - 400 V Thermal contact supervision Cable area max: 6 mm² Bluetooth Starter (Small box) DCM 711 3-phase 50 Hz 415V - 440 V Thermal contact supervision Cable area max: 6 mm² Bluetooth Starter (Small box) DCM 711 3-phase 60 Hz 380V - 400 V Thermal contact supervision Cable area max: 6 mm² Bluetooth Starter (Small box) DCM 711 3-phase 60 Hz 440V - 480 V Thermal contact supervision Cable area max: 6 mm² Bluetooth Starter (Small box) DCM 711 3-phase 60 Hz 575V - 600 V Thermal contact supervision Cable area max: 6 mm² Bluetooth	1
815	648 36 17		Starter START 350-400-A-532-20 350 3-phase 50 Hz 380V - 415 V Current range: 16 - 20 A Overload supervision Phase sequence indicator Supply connection CEE 5-PLUG 32A Cable gland diameter: 10 - 20 mm Not CSA approved	1
815	648 36 47		Starter START 350-400-A-PG-20 350 3-phase 50 Hz 415V - 440 V Current range: 16 - 20 A Overload supervision Phase sequence indicator Supply connection Terminal connection Cable gland diameter: 10 - 20 mm Not CSA approved	1

Pos. No	Part. No	Type	Denomination	Qty/Version	
				180	
815	648 36 46		Starter START 350-400-A-PG-16 350 3-phase 50 Hz 500V - 500 V Current range: 12,50 - 16 A Overload supervision Phase sequence indicator Supply connection Terminal connection Cable gland diameter: 10 - 20 mm Not CSA approved	1	
815	554 30 17		Starter START 351-400- B-532-23 351 3-phase 50 Hz 380V - 415 V Current range: 17 - 23 A Thermal contact supervision Overload supervision Phase sequence indicator Supply connection CEE 5-PLUG 32A Cable gland diameter: 11 - 21 mm Not CSA approved	1	
815	554 30 47		Starter START 351-400-B-PG-23 351 3-phase 50 Hz 380V - 415 V Current range: 17 - 23 A Thermal contact supervision Overload supervision Phase sequence indicator Supply connection Terminal connection Cable gland diameter: 11 - 21 mm Not CSA approved	1	
815	554 30 76		Starter START 351-500- B-432-18 351 3-phase 50 Hz 500V - 500 V Current range: 13 - 18 A Thermal contact supervision Overload supervision Phase sequence indicator Supply connection CEE 4-PLUG 32A Cable gland diameter: 11 - 21 mm Not CSA approved	1	
815	554 30 56		Starter START 351-500-B-PG-18 351 3-phase 50 Hz 440V - 500 V Current range: 13 - 18 A Thermal contact supervision Overload supervision Phase sequence indicator Supply connection Terminal connection Cable gland diameter: 11 - 21 mm Not CSA approved	1	
815	554 20 07		Starter START 356-600-A-PG-25 356-A 3-phase 60 Hz 440V - 480 V Current range: 17 - 23 A Overload supervision Supply connection Terminal connection Cable gland diameter: 13 - 25 mm CSA approved	1	
815	554 20 06		Starter START 356-600-A-PG-20 356-A 3-phase 60 Hz 575V - 600 V Current range: 13 - 18 A Overload supervision Supply connection Terminal connection Cable gland diameter: 13 - 25 mm CSA approved	1	

Pos. No	Part. No	Type	Denomination	Qty/Version
				180
815	554 21 06		Starter START 356-600-B-PG-20 356-B 3-phase 60 Hz 575V - 600 V Current range: 13 - 18 A Thermal contact supervision Overload supervision Supply connection Terminal connection Cable gland diameter: 13 - 25 mm CSA approved	1
815	824 35 19		Starter Starter (Large box) DCM 711 3-phase 50 Hz 220V - 240 V Thermal contact supervision Cable area max: 13,30 mm ² Bluetooth WiFi Starter (Large box) DCM 711 3-phase 60 Hz 220V - 240 V Thermal contact supervision Cable area max: 13,30 mm ² Bluetooth WiFi Starter (Large box) DCM 711 3-phase 60 Hz 200V - 208 V Thermal contact supervision Cable area max: 13,30 mm ² Bluetooth WiFi	1

Pos. No	Part. No	Type	Denomination	Qty/Version
				180
815	824 35 16		Starter Starter (Small box) DCM 711 3-phase 60 Hz 440V - 480 V Thermal contact supervision Cable area max: 6 mm² Bluetooth WiFi Starter (Small box) DCM 711 3-phase 60 Hz 380V - 400 V Thermal contact supervision Cable area max: 6 mm² Bluetooth WiFi Starter (Small box) DCM 711 3-phase 50 Hz 415V - 440 V Thermal contact supervision Cable area max: 6 mm² Bluetooth WiFi Starter (Small box) DCM 711 3-phase 50 Hz 525V - 550 V Thermal contact supervision Cable area max: 6 mm² Bluetooth WiFi Starter (Small box) DCM 711 3-phase 50 Hz 660V - 690 V Thermal contact supervision Cable area max: 6 mm² Bluetooth WiFi Starter (Small box) DCM 711 3-phase 50 Hz 380V - 400 V Thermal contact supervision Cable area max: 6 mm² Bluetooth WiFi Starter (Small box) DCM 711 3-phase 50 Hz 500V - 500 V Thermal contact supervision Cable area max: 6 mm² Bluetooth WiFi Starter (Small box) DCM 711 3-phase 60 Hz 575V - 600 V Thermal contact supervision Cable area max: 6 mm² Bluetooth WiFi	1
816	736 67 00		Wear part kit HT 50HZ	1
816	736 67 01		Wear part kit HT 60HZ	1
816	736 67 02		Wear part kit MT 50HZ	1
816	736 67 03		Wear part kit MT 60HZ	1
816	736 67 04		Wear part kit SH 50HZ	1
816	736 67 05		Wear part kit SH 60HZ	1
817	736 68 06		Hydraulic repair kit HT NBR	1
817	736 68 07		Hydraulic repair kit MT NBR	1
817	736 68 08		Hydraulic repair kit HT PU	1
817	736 68 09		Hydraulic repair kit MT PU	1
817	736 68 10		Hydraulic repair kit SH NBR	1
817	736 68 11		Hydraulic repair kit SH PU	1
900	782 81 01		Basic repair kit	1



ООО «Бауманс Групп» - официальный партнер фирмы Flygt в России.

Тел: +7 495 121 49 50

Эл. почта: info@baumgroup.ru

Сайт: www.baumgroup.ru